
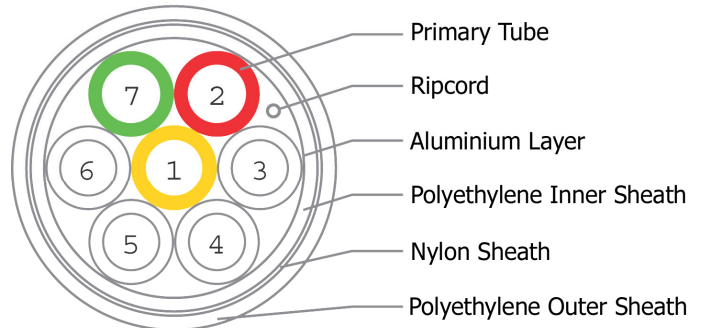


Sirocco Tubes (External) - Direct Bury Anti-Termite Assembly

Prysmian Part Number: See Following Page

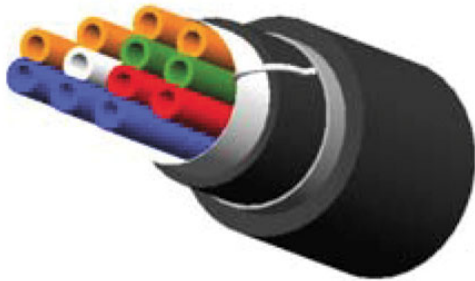

Profile of a 7 way assembly

Empty HDPE low friction tubes of small diameter for blown fibre installations where termite protection is required.

- Rapid dedicated customer connect using proven mechanical protection of HDPE.
- Low friction internal coating for maximum fibre blowing distance.
- 5 mm O/D, each tube accommodates up to a 12 fibre unit.
- Outdoor versions available in different constructions – direct install, heavy duty, steel armour, anti-termite, anti-rodent.
- Recommended for environments subject to termite infestation. A nylon layer between the two polyethylene sheaths provides resistance to termites and ants.
- Aluminium layer acts as moisture barrier.
- Individual tubes available in opaque or translucent material for fibre visibility.
- Choice of colours, can be customised to suit user requirements.
- Supplied on wooden drums. Each drum can contain either one continuous length of tube or multiple lengths for simultaneous installation.

Benefits

Simplified Planning

- Network is built according to today’s needs.
- Fibre count can be increased as demand grows.

Cost Effective

- Pay as you grow – install empty tubes and only pay for fibre as and when required, spreading capital investment overtime.
- Reduced splicing – minimises branching and splicing of traditional networks thus reducing engineering costs.
- Continuous upgrade and repair of network with minimal installation cost and disruption.

Increased Flexibility

- Future proof network build.
- Networks are easily upgraded, branched or extended, giving maximum flexibility and uninterrupted fibre blowing right to the destination.
- Simplified emergency restoration.

Multi-tube Direct Bury Anti-Termite Assembly

Assembly of tubes surrounded by an aluminium moisture barrier, an inner polyethylene sheath, a nylon middle sheath for protection against attacks from termites and ants and an outer polyethylene sheath.

- Available in 1, 2, 4, 7, 12, 19, 24 way (3mm O/D available on request).

Assembly type	Product Code	Nominal O.D. (mm)	Aluminium Sheath	Ripcord Qty	Min. Bend Radius (mm)	Max. Tensile (N)	Nominal Weight (g/m)	Drum Lengths (m)	
1 Way	OMT0501	11.5	150	1	336	1595	100	500m D*	2000m R
								1000m R*	4000m R
2 Way	OMT0502	11.5 x 16.5	150	1	336	2420	145	500m D	2000m R
								1000m R	4000m R
4 Way	OMT0504	18.6	150	1	510	3025	204	500m D	2000m R
								1000m R	4000m R
7 Way	OMT0507	22.1	150	1	600	4400	292	500m D	2000m R
								1000m R	4000m R
12 Way	OMT0512	29.5	150	1	720	4950	484	1000m R	3000m R
								2000m R	
19 Way	OMT0519	34.3	150	1	876	6050	621	1000m R	
								2000m R	
24 Way	OMT0524	38.8	150	1	1020	6600	762	1000m R	
								2000m R	

D* Disposable Drum R* Returnable Drum

Tensile

Tested in accordance with IEC 60794-1-2 Method E1. There shall be no permanent deformation of the primary or assembly parts after an applied load of 1.0 (spec. weight kg/km) N at 20mm/minute.

Crush Performance

Tested in accordance with IEC 60794-1-2 Method E3. After a maintained load of 2KN for 1 minute there shall be no deformation of primary tubes greater than 0.5 mm.

Stress Crack Resistance

Tested in accordance with BS6469 Section 99.1 with chemical Caflon CF30.

Prysmian Telecom Cables & Systems UK Ltd, Chickenhall Lane, Bishopstoke, Hants SO50 6YU, UK

Technical Enquiries +44 (0) 2380 608760 Fax Number +44 (0) 2380 608769

© PRYSMIAN 2005. All Rights Reserved.

The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of Prysmian. The information is believed correct at the time of issue. Prysmian reserves the right to amend this specification without notice. This specification is not contractually valid unless specifically authorised by Prysmian.

Issue 01, October 2005
Ref: SR007